

SINEAX VK 626, Programmable Temperature Transmitter for RTD and TC inputs, with HART protocol

for installation in the terminal head of a temperature sensor DIN 43 729, shape B



Application

SINEAX VK 626 is a two-wire head-mounted transmitter. It is designed for **measuring temperature in combination with thermocouples or resistance thermometers**. Thermocouple non-linearities are automatically compensated. The output signal is a current in the range 4...20 mA.

Measured variable and measuring range are programmed using a PC with a suitable interface and running the programming software.

The sensor circuit is monitored for open and short-circuits and the output responds in a defined manner if one is detected.

The power supply of (12...30 V DC) is connected together with the signal by the two leads connected to the measurement output (loop powered).



Fig. 1. Measuring transmitter SINEAX VK 626 – 7A/7B, input/output electrically isolated.

Features / Benefits

- **Two-wire programming (HART protocol) of measured variable and measuring range**

| Measured variables | Measuring ranges | | |
|--|------------------|-----------|-----------|
| | Limits | Min. span | Max. span |
| Temperatures with resistance thermometers for two, three or four-wire connection Pt 100, IEC 60 751 Ni 100, DIN 43 760 | – 200 to 850 °C | 50 K | 850 K |
| | – 60 to 250 °C | 50 K | 250 K |
| Temperatures with thermocouples Type B, E, J, K, N, R, S, T acc. to IEC 60 584-1 Type L and U, DIN 43 710 Type W5 Re/W26 Re, Type W3 Re/W25 Re acc. to ASTM E 988-90 | acc. to type | 2 mV | 80 mV |

- **Electrical isolation between input and output / Prevents measurement errors due to potential leakage**
- **Open and short-circuit sensor circuit supervision / Defined output response should the supervision pick up**
- **Terminals with captive screws**
- **Available in type of protection “Intrinsic safety” EEx ia IIC T6** (see “Table 3: Data on explosion protection”)

| | | |
|-----------------------------|---------------------------|--|
| Basic configuration: | Measuring input | Pt 100 for three-wire connection |
| | Measuring range | 0 ... 600 °C |
| | Measuring output: | 4 ... 20 mA, linearised with temperature |
| | Open-circuit supervision: | Output 21.6 mA |
| | Response time: | Approx. 1.5/2 s (Table 2) |
| | Mains ripple suppression: | For frequency 50 Hz |

Standard versions

The following versions are available ex stock already programmed for the **basic** configuration. It is only necessary to quote the **Order No.:**

Table 1:

| Version | Dimensions Ø 43 mm | Order Code | Order No. |
|--------------------------------------|-----------------------|------------|-----------|
| Standard, electrically isolated | Height 30.8 mm | 626-7A0 | 141 424 |
| EEx ia IIC T6, electrically isolated | Height 30.8 mm | 626-7B0 | 141 432 |

Please complete the Order Code 626-7.1. according to “Table 4: Specification and ordering information” for versions with user-specific input ranges.

SINEAX VK 626, Programmable Temperature Transmitter for RTD and TC inputs, with HART protocol

Programming

The SINEAX VK 626 is configured via a 4...20 mA two-wire lead using the HART protocol.

Programming is accomplished using a PC with a suitable interface (e.g. Smar HI 311, MACTeck Viator 010001, Siemens 7MF 4997-1DA) and running the programming software.

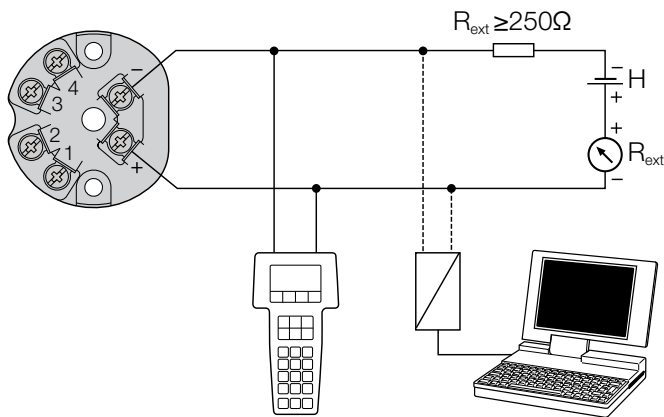


Fig. 2.

Technical Data

Measuring input

Temperature with resistance thermometers

Measuring range limits: See table 5
 Resistance types: Type Pt 100 (IEC 60 751)
 Type Ni 100 (DIN 43 760)
 Other sensor types configurables
 Measuring current: ≤ 0.20 mA
 Standard circuit: 1 resistance thermometer for **two-, three- or four-**wire connection
 Input resistance: $R_i > 10$ M Ω
 Lead resistance: ≤ 30 Ω per lead

Temperature with thermocouple

Measuring range limits: See table 5
 Thermocouple pairs:
 Type B: Pt30Rh-Pt6Rh (IEC 584)
 Type E: NiCr-CuNi (IEC 584)
 Type J: Fe-CuNi (IEC 584)
 Type K: NiCr-Ni (IEC 584)
 Type L: Fe-CuNi (DIN 43710)
 Type N: NiCrSi-NiSi (IEC 584)
 Type R: Pt13Rh-Pt (IEC 584)
 Type S: Pt10Rh-Pt (IEC 584)
 Type T: Cu-CuNi (IEC 584)
 Type U: Cu-CuNi (DIN 43710)
 Type W5 Re/W26 Re (ASTM)
 Type W3 Re/W25 Re (E 988-90)
 Standard circuit:
 1 thermocouple, **internal** cold junction compensation with built-in Pt100 or
 1 thermocouple, **external** cold junction compensation
 Input resistance: $R_i > 10$ M Ω


Cold junction compensation:

Internal: With built-in Pt 100 or with Pt 100 connected to the terminals
 External: Via cold junction thermostat 0 ... 60 °C, configurable

Measuring output

Output signal I_A : (output/powering circuit)
 Impressed DC current, **linear with temperature**
 Standard range: 4...20 mA, 2-wire technique

External resistance (load): $R_{ext \max.} [\text{k}\Omega] = \frac{\text{Power supply [V]} - 12 \text{ V}}{\text{Max. output current [mA]}}$

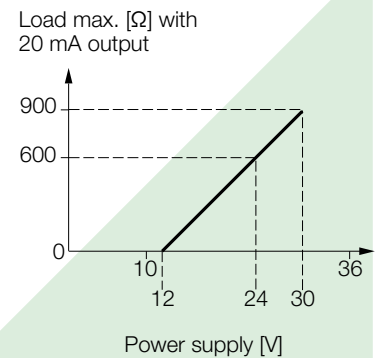

Residual ripple in output current: $< 1\%$ p.p.

Table 2: Response time

| Measuring mode | Open sensor circuit | Short-circuit | Possible response times approx. [s] | | | | | | | |
|----------------|---------------------|---------------|-------------------------------------|-----|-----|-----|------|------|------|--|
| | | | Option | | | | | | | |
| TC int. comp. | aktive | – | 1.5 | 2.5 | 3.5 | 6.5 | 11 | 20.5 | 40 | |
| TC int. comp. | off | – | 1.5 | 2.5 | 3.5 | 6.5 | 13.5 | 24.5 | 49.5 | |
| TC ext. comp. | aktive | – | 1.5 | 2.5 | 3.5 | 6.5 | 11 | 20.5 | 40 | |
| TC ext. comp. | off | – | 1.5 | 2.5 | 4 | 6.5 | 13.5 | 24.5 | 48.5 | |
| RTD 2L | aktive | – | 2 | 2.5 | 3 | 5 | 9.5 | 17.5 | 33.5 | |
| RTD 3L, 4L | aktive | aktive | 2 | 2.5 | 4 | 6.5 | 11.5 | 21 | 40.5 | |
| RTD 2L,3L,4L | off | off | 1.5 | 2.5 | 3.5 | 7.5 | 14 | 26.5 | 50.5 | |

*) Standard values, also valid for basic configuration

Accuracy data (acc. to EN/IEC 60 770-1)

Reference value: Measuring span
 Basic accuracy: Error limits $\leq \pm 0.2\%$ at reference conditions

Reference conditions

Ambient temperature: 23 °C
 Power supply: 18 V DC
 Output burden: 250 Ω

¹⁾ Note HART FSK Physical Layer Specifications!

SINEAX VK 626, Programmable Temperature Transmitter for RTD and TC inputs, with HART protocol

Settings: Pt100, 3-wire, 0...600 °C

Additional errors (additive)

Low measuring ranges

Voltage measurement: $\pm 5 \mu\text{V}$ at measuring spans < 10 mV

Resistance thermometer: $\pm 0.3 \text{ K}$ at measuring spans < 400 °C

Thermocouple:

Type U, T, L, J, K, E $\pm 0.1 \text{ K}$ at measuring spans < 200 °C

Type N $\pm 0.13 \text{ K}$ at measuring spans < 320 °C

Type S, R $\pm 0.42 \text{ K}$ at measuring spans < 1000 °C

Type B $\pm 0.6 \text{ K}$ at measuring spans < 1400 °C

High initial value: (Additional error = Factor · Initial value)

Factor

Voltage measurement: $\pm 0.1 \mu\text{V} / \text{mV}$

Resistance thermometer: $\pm 0.00075 \text{ K} / \text{°C}$

Thermocouple:

Type U, T, L, J, K, E $\pm 0.0006 \text{ K} / \text{°C}$

Type N $\pm 0.0008 \text{ K} / \text{°C}$

Type S, R $\pm 0.0025 \text{ K} / \text{°C}$

Type B $\pm 0.0036 \text{ K} / \text{°C}$

Influence of lead resistance at resistance thermometer: $\pm 0.01\%$ per Ω

Internal cold junction compensation: $\pm 0.5 \text{ K}$

Linearisation: $\pm 0.3\%$

Influencing factors

Temperature: $\leq \pm (0.15\% + 0.15 \text{ K})$ per 10 K with temperature measurement
 $\leq \pm (0.15\% + 12 \mu\text{V})$ per 10 K with voltage measurement

Power supply influence (power supply on terminals): $\leq \pm 0.005\%$ per V

Long-time drift: $\leq \pm 0.1\%$

Common and transverse mode influence: $\leq \pm 0.2\%$

Open and short-circuit sensor circuit supervision

Signalling modes: Output signal programmable to...
... the value the output had immediately prior to the open or short-circuit (hold value)
... a value between 4 and 21.6 mA

Power supply →○

DC voltage: Supply 12...30 V DC
max. residual ripple 1% p.p.¹
(supply must not fall below 12 V)
Protected against wrong polarity

HART communication

HART protocol: Revision 5.10

Installation data

Dimensions: See section "Dimensional drawing"

Housing: Lexan 940 (polycarbonate)
Flammability class V-0 acc. to UL 94, self-extinguishing, non-dripping, free of halogen

Mounting position: Any

Electrical connections: Screw terminals with Philips heads for max. $2 \times 1.5 \text{ mm}^2$

Weight: Approx. 60 g

Mounting: Shape B version of terminal head held by two M4 cheese-headed screws and two springs

Standards

Electromagnetic compatibility: The standards EN 50 081-2 und EN 50 082-2 are observed

Intrinsically safe: Acc. to EN 50 020

Protection (acc. to IEC 529 resp. EN 60 529): Housing IP 40
Terminals IP 00

Electrical standards: Acc. to IEC 1010 resp. EN 61 010

Test voltage: 1500 V AC, applied between measuring input and output

Ambient conditions

IEC 68-1-1/-2/-3/-6/-27 resp.
EN 60 068-2-1/-2/-3/-6/-27 Ambient tests
- 1 Cold, - 2 Dry heat, - 3 Damp heat, - 6 Vibration, - 27 Shock

Ambient temperature range: -25 to + 80 °C
at NEx and Ex (T4)
at Ex (T6) dependent of Pi, see EC-type-examination Certificate

Storage temperature range: -40 to + 80 °C

Annual mean relative humidity: $\leq 75\%$, no moisture condensation

Altitude: 2000 m max.

Indoor use statement

¹⁾ Note HART FSK Physical Layer Specifications!

SINEAX VK 626, Programmable Temperature Transmitter for RTD and TC inputs, with HART protocol

Table 3: Data on explosion protection  **II 2 (1) G**

| Order Code | Type of protection Marking | Electrical data acc. to Certificate | | Certificate | Mounting location |
|------------|----------------------------|---|--|--|--|
| | | Sensor input | Output of device | | |
| 626 - 7B | EEx ia IIC T6 | $U_o = 6 \text{ V}$ $I_o = 5 \text{ mA}$ $P_o = 11 \text{ mW}$ $C_o = 1864 \text{ nF}$ $L_o = 5 \text{ mH}$ | $U_i = 30 \text{ V}$ $I_i = 160 \text{ mA}$ $P_i = \text{max. } 1 \text{ W}^*$ $C_i = 0$ $L_i = 0$ | EC-type-examination Certificate ZELM 01 ATEX 0067 | Within the hazardous area, zone 1 and 2** |

* According to temperature class

** It is permissible for the sensor circuit to enter zone 0, however, EN 50 284 and any applicable national standards must be observed.

Table 4: Specification and ordering information (see also Table 1: Standard versions)

| Features, Selection | Blocking code | no-go with blocking code | Article No./ Feature |
|---|---------------|--------------------------|----------------------|
| Order Code 626 – xxxx xxxx xxx | | | 626 – |
| 1. Housing (power supply via output leads) For installation in a terminal head DIN 43 729, shape B | | | 7 |
| 2. Version Not intrinsically safe | | | 1 |
| EEx ia IIC T6, intrinsically safe electrical circuits | | | 2 |
| 3. Configuration Basic configuration, programmed, (Pt100, 3-wire, 0 ... 600 °C) All types with basic configuration are available as standard versions, see table 1, specification complete! Configured to order The following features 4 to 11 must be fully specified! | G | | 0 |
| 4. Measuring unit Temperatures in °C | | | 1 |
| Temperatures in °F | | G | 2 |
| Temperatures in K | | G | 3 |
| 5. Measuring mode, input connection Thermocouple Internal cold junction compensation, with built-in Pt100 | T | G | 1 |
| External cold junction compensation t_k <input type="text"/> | T | G | 2 |
| Specify external cold junction temperature in tK (in °C, °F or K, acc. to specification in Feature 4), any value between 0 and 60 °C or equivalent. | | | |
| Resistance thermometer Two-wire connection R_L <input type="text"/> [Ω] | R | G | 3 |
| Specify total lead resistance R_L [Ω], any value between 0 and 60 Ω | | | |
| Three-wire connection, $R_L \leq 30 \text{ } \Omega$ / wire | R | | 4 |
| Four-wire connection, $R_L \leq 30 \text{ } \Omega$ / wire | R | G | 5 |

SINEAX VK 626, Programmable Temperature Transmitter for RTD and TC inputs, with HART protocol

| Features, Selection | Blocking code | no-go with blocking code | Article No./ Feature |
|---|---------------|--------------------------|----------------------|
| Order Code 626 – xxxx xxxx xxx | | | 626 – |
| 6. Sensor type / measuring range | | | |
| Sensor type / beginning ... end value of measuring range | | | |
| RTD Pt 100 | Range | | T |
| RTD Ni 100 | Range | | GT |
| RTD Pt ... [Ω] | Range | | GT |
| RTD Ni ... [Ω] | Range | | GT |
| TC Type B | Range | | GR |
| TC Type E | Range | | GR |
| TC Type J | Range | | GR |
| TC Type K | Range | | GR |
| TC Type L | Range | | GR |
| TC Type N | Range | | GR |
| TC Type R | Range | | GR |
| TC Type S | Range | | GR |
| TC Type T | Range | | GR |
| TC Type U | Range | | GR |
| TC W5-W26Re | Range | | GR |
| TC W3-W25Re | Range | | GR |
| Specify measuring range in $^{\circ}\text{C}$, $^{\circ}\text{F}$ or $[\text{K}]$; refer to table 5 for the operating limits for each type of sensor. | | | |
| Lines 3 and 4: Specify resistance in Ω at 0°C , any value between 50 and 4000 Ω | | | |
| 7. Output characteristic | | | |
| Standard 4 ... 20 mA | | | 0 |
| Inversely 20 ... 4 mA | | G | 1 |
| 8. Open and short-circuit sensor signalling | | | |
| Output response for an open or short-circuit* sensor | | | |
| Output 21.6 mA | | | 0 |
| Output (any value between 4 and < 21.6 mA) | [mA] | G | 1 |
| Hold output at last value | | G | 2 |
| No signal | | G | A |
| *) The short-circuit signal is only active for the RTD measuring mode $\geq 100 \Omega$ at 0°C and three or four-wire connection. | | | |
| 9. Output time response | | | |
| Standard setting time approx. 2 s | | | 0 |
| Setting time (admissible values see Table 3) | [s] | G | 9 |
| 10. Mains ripple suppression | | | |
| Frequency 50 Hz | | | 0 |
| Frequency 60 Hz | | G | 1 |
| 11. Test certificate | | | |
| Without test certificate | | | 0 |
| Test certificate in German | | G | D |
| Test certificate in English | | G | E |

Lines with letter(s) under "no-go" cannot be combined with preceding lines having the same letter under "Blocking code".

SINEAX VK 626, Programmable Temperature Transmitter for RTD and TC inputs, with HART protocol

Table 5: Temperature measuring ranges

| Measuring ranges [°C] | Resistance thermometers | | Thermocouples | | | | | | | | | | | |
|-----------------------------|--|------------|--|--------------|--------------|--------------|-------------|--------------|-------------|-------------|-------------|-------------|-----------------|-----------------|
| | Pt100 | Ni100 | B | E | J | K | L | N | R | S | T | U | C ¹⁾ | D ²⁾ |
| 0... 40 | X | | | X | X | | X | | | | | | | |
| 0... 50 | X | X | | X | X | X | X | | | | X | X | | |
| 0... 60 | X | X | | X | X | X | X | | | | X | X | | |
| 0... 80 | X | X | | X | X | X | X | X | | | X | X | | |
| 0... 100 | X | X | | X | X | X | X | X | | | X | X | | |
| 0... 120 | X | X | | X | X | X | X | X | | | X | X | | |
| 0... 150 | X | X | | X | X | X | X | X | | | X | X | X | |
| 0... 200 | X | X | | X | X | X | X | X | | | X | X | X | X |
| 0... 250 | X | X | | X | X | X | X | X | | | X | X | X | X |
| 0... 300 | X | | | X | X | X | X | X | X | X | X | X | X | X |
| 0... 400 | X | | | X | X | X | X | X | X | X | X | X | X | X |
| 0... 500 | X | | | X | X | X | X | X | X | X | | X | X | X |
| 0... 600 | X | | | X | X | X | X | X | X | X | | X | X | X |
| 0... 800 | X | | X | X | X | X | X | X | X | X | | | X | X |
| 0... 900 | | | X | X | X | X | X | X | X | X | | | X | X |
| 0...1000 | | | X | X | X | X | | X | X | X | | | X | X |
| 0...1200 | | | X | | X | X | | X | X | X | | | X | X |
| 0...1500 | | | X | | | | | | X | X | | | X | X |
| 0...1600 | | | X | | | | | | X | X | | | X | X |
| 0...1800 | | | X | | | | | | | | | | X | X |
| 0...2000 | | | | | | | | | | | | | X | X |
| 50... 150 | X | X | | X | X | X | X | X | | | X | X | | |
| 100... 300 | X | | | X | X | X | X | X | | | X | X | X | X |
| 200... 500 | X | | | X | X | X | X | X | X | X | | X | X | X |
| 300... 600 | X | | | X | X | X | X | X | X | X | | X | X | X |
| 600... 900 | | | X | X | X | X | X | X | X | X | | | X | X |
| 600...1000 | | | X | X | X | X | | X | X | X | | | X | X |
| 900...1200 | | | X | | X | X | | X | X | X | | | X | X |
| 600...1600 | | | X | | | | | | X | X | | | X | X |
| 600...1800 | | | X | | | | | | | | | | X | X |
| -10... 40 | X | X | | X | X | X | X | | | | | X | | |
| -30... 60 | X | X | | X | X | X | X | X | | | X | X | | |
| Measuring range limits [°C] | -200 to 850 | -60 to 250 | 0 to 1820 | -270 to 1000 | -210 to 1200 | -270 to 1372 | -200 to 900 | -270 to 1300 | -50 to 1769 | -50 to 1769 | -270 to 400 | -200 to 600 | 0 to 2315 | 0 to 2315 |
| | ΔR min. 15 Ω at final value ³⁾ $\leq 400 \Omega$ ΔR min. 150 Ω at final value $> 400 \Omega$ max. final value 4000 Ω Initial value $\leq 10 \Delta R$ | | ΔU min. 2 mV, max. 80 V $\frac{\text{Initial value}}{\Delta U} \leq 10$ | | | | | | | | | | | |


¹⁾ W5 Re W26 Re (ASTM E 988-90)

²⁾ W3 Re W25 Re (ASTM E 988-90)

³⁾ For two-wire connection, the final value is made up of the measured final value [Ω] plus the total resistance of the leads.

SINEAX VK 626, Programmable Temperature Transmitter for RTD and TC inputs, with HART protocol

Electrical connections

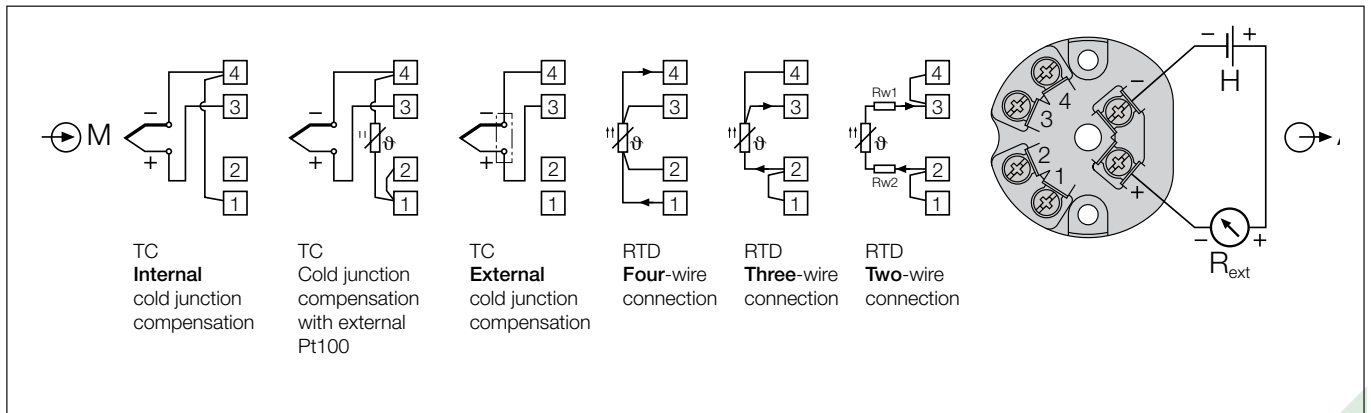

⊕ = Measuring input

⊖ = Two-wire measuring output (measuring circuit)
(4 ... 20 mA signal)

⊖ = Power supply H 12 ... 30 V DC

Table 6: Accessories

| Description | Order No. |
|---|-----------|
| Configuration software V 600 plus for SINEAX VK 616, VK 626, V 608 and V 624 Windows 3.1x, 95, 98, NT and 2000 on CD in German, English, French, Spanish, Italian and Dutch. (Download free of charge under http://www.camillebauer.com) In addition, the CD contains all configuration programmes presently available for Camille Bauer products. | 146 557 |
| Operating Instructions VK 626 Bd in German | 141 961 |
| Operating Instructions VK 626 Bf in French | 142 084 |
| Operating Instructions VK 626 Be in English | 142 133 |

Dimensional drawings

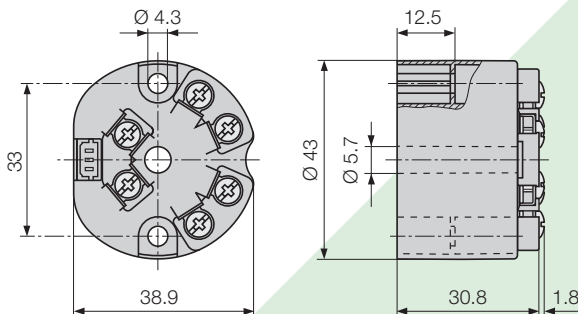


Fig. 3. SINEAX VK 626.

Standard accessories

- 1 Operating Instructions in German, French and English
- 1 Type examination certificate (only for "intrinsically safe" explosion-proof devices)

CAMILLE BAUER

Rely on us.

Camille Bauer Ltd
 Aargauerstrasse 7
 CH-5610 Wohlen / Switzerland

Phone: +41 56 618 21 11

Fax: +41 56 618 35 35

e-mail: info@camillebauer.com

www.camillebauer.com